


H 340 mm
L 800 mm
Z 500 mm

TECHNICAL
DATA
PAG 243

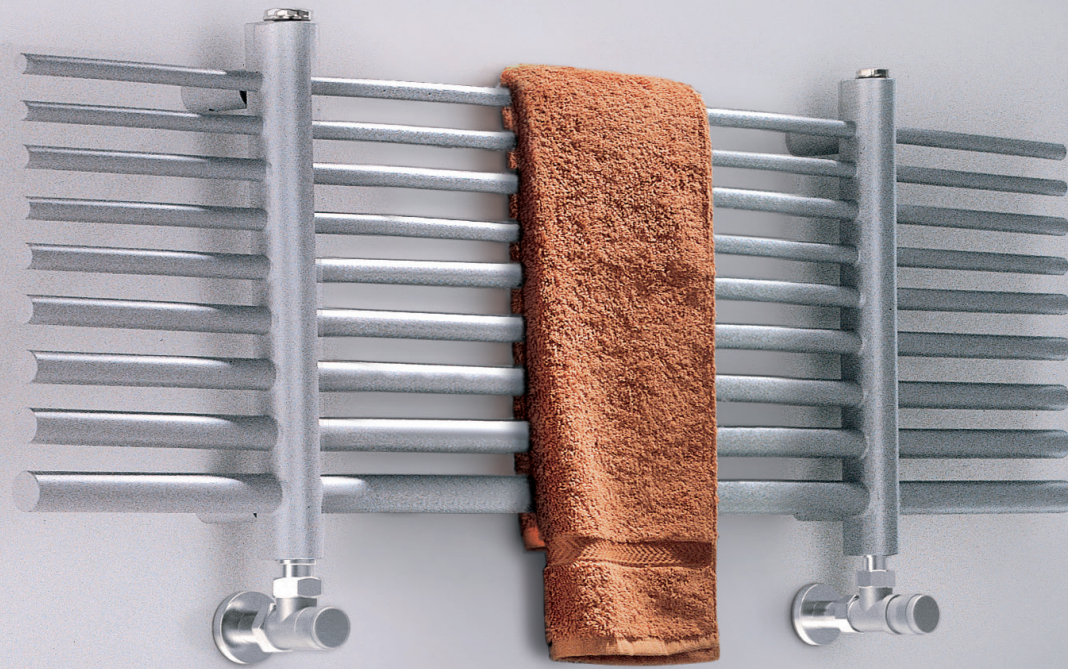



SCALDASALVIETTE/TOWEL WARMERS

SELENE


design Scirocco H LAB



	IT	UK	FR	ES	DE
	- Acciaio	- Steel	- Acier	- Acero	- Stahl
	- Staffe a parete, stessa finitura del radiatore - Valvola di sfio - Tappo cieco	- Wall brackets, same finishing as the radiator - Exhaust valve - Blind cap	- Supports muraux, même finition du radiateur - Vanne de décompression - Bouchon borgne	- Soportes de pared: el mismo acabado que el radiador - Purgador - Tapón ciego	- Wandbügel, dieselbe Ausführung des Heizkörpers - Verschlussstopfen - Entlüftungsventil
	- Bianco RAL 9010 - Gamma colori Scirocco H - Cromo	- White RAL 9010 - Colour chart Scirocco H - Chrome	- Blanc RAL 9010 - Gamme couleurs Scirocco H - Chrome	- Blanco RAL 9010 - Gama de colores Scirocco H - Cromo	- Weiß RAL 9010 - Farbpalette von Scirocco H - Chrom
	- Fornito con resistenza elettrica completa di cavo e spina Schuko - A richiesta disponibile con termostato, pg 256	- Furnished with electrical heating element complete with cable and Schuko plug - On demand available with thermostat, pg 270	- Fourni avec résistance électrique standard en classe II avec câble électrique et prise Schuko - Sur demande disponible avec thermostat, pg 284	- Se suministra con resistencia eléctrica, con cable y enchufe Schuko - Disponible bajo petición con termostato, pg 298	- Mit elektrischem Widerstand, komplett mit Kabel und Schukostecker - Auf Anfrage verfügbar mit Raumthermostat, pg 312
	- Valvole e detentori, pg 257 - Attacchi: 1/2" G - Pressione massima d'esercizio: 4 bar - Disponibile per impianti monotubo - Kit copritubo, pg 262	- Valves and holders, pg 271 - Connections: 1/2" G - Maximum working pressure: 4 bar - Available for single tube installation - Tube cover kit, pg 276	- Vannes et raccord réglables, pg 285 - Connection: 1/2" G - Pression maximale de service: 4 bar - Disponible pour installations monotube - Kit cache-tube, pg 290	- Válvulas y llaves de cierre, pg 299 - Conexiones: 1/2" G - Presión máxima de trabajo: 4 bar - Disponible para instalaciones monotubo - Kit de cobertura tubo, pg 304	- Ventil und Drossel, pg 313 - Anschlüsse: 1/2" G - Maximaler Betriebsdruck: 4 bar - Einrohr-Anlagen verfügbar - Rohrverkleidungssatz, pg 318

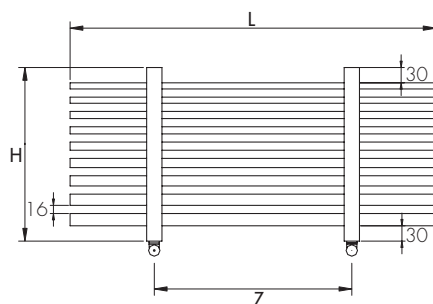

SE 34x80

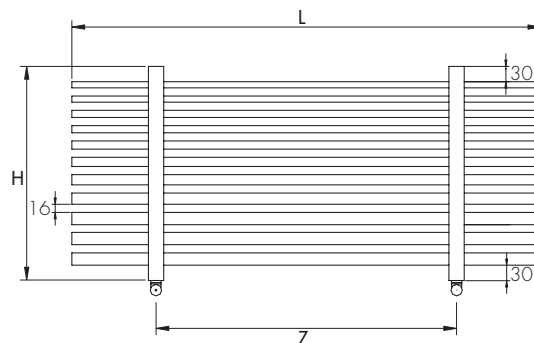

SE 40x10

RESE TERMICHE - THERMAL OUTPUT
UNI EN 442 (ΔT 50 K)

$$\text{Watt} = \text{Kcal/h} \div 0,860$$

$$\text{Kcal/h} = \text{Watt} \times 0,860$$

ART.	DIMENSIONI DIMENSIONS			RESA OUTPUT	RESA CROMO OUT. CHROME	CAPACITÀ CAPACITY	PESO WEIGHT	RESISTENZA RESISTANCE
	L	H	Z					
SE 34x80	800	340	500	458	366	1,7	3,1	100
SE 40x10	1000	418	700	588	470	2,1	3,8	200

IDRAULICO
HYDRAULIC

RAL 9010 BIANCO LUCIDO WHITE POLISHED	COLORE COLOR	CROMO CHROME
€	€	€

ELETTRICO
ELECTRIC

RAL 9010 BIANCO LUCIDO WHITE POLISHED	COLORE COLOR	CROMO CHROME
€	€	€